
REGITEC

POWERING THE FUTURE

RMH54-390~415B1

390~415 Watt


182mm 108Cells PV Module

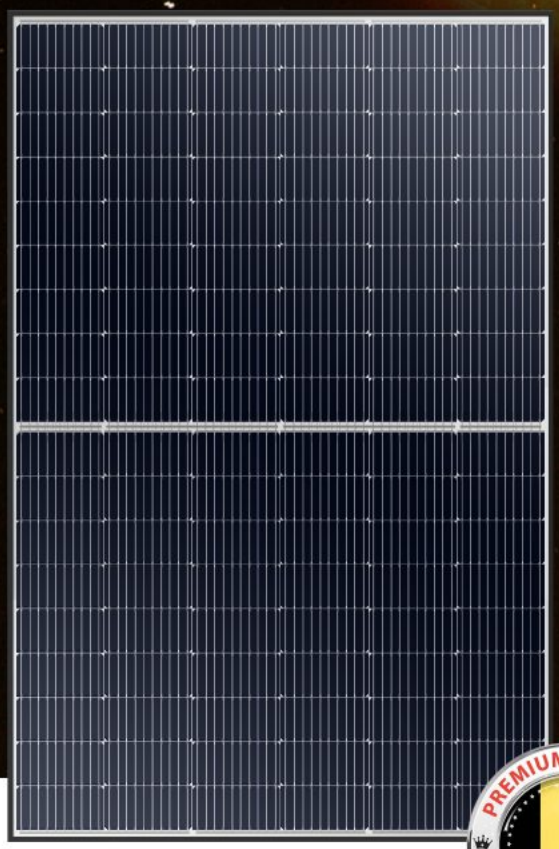

BLACK *BLACK FRAME&BLACK BACK-SHEET PRODUCTS ARE AVAILABLE UPON REQUEST

25 years product warranty

30 years performance warranty

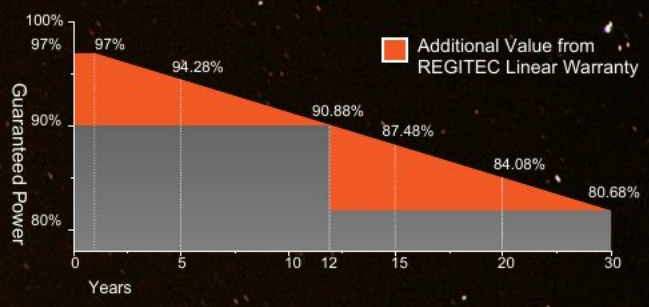

PREMIUM QUALITY

PRODUCT FEATURE

- High transmissivity, low-iron tempered glass.
- Using high efficiency mono solar cells
- Excellent performance in low-light environments
- High quality junction box and connector systems
- 100% inspection, to guarantee the reliability of solar systems
- Anti LID
- Anti PID
- Lower temperature coefficient
- Quality RFID Tracking

MANAGEMENT SYSTEM

ISO 9001:
Quality management system

ISO 14001:
Standard for environmental management system

OHSAS 18001:
International standard for occupational health and safety assessment system


PRODUCT CERTIFICATES

REGITEC

RMH54-390~415B1

182mm 108Cells PV Module


Dimension Drawing

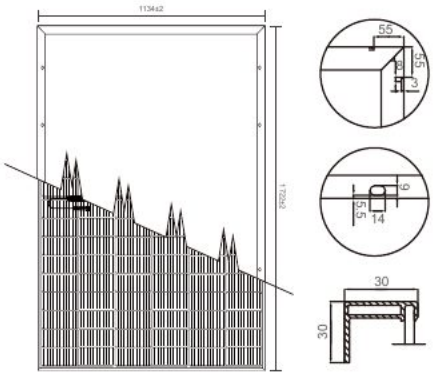


All Dimensions in mm
The above drawing is a graphical representation of the product.
For engineering quality drawings please contact REGITEC.

I-V Graph

Current-Voltage & Power-Voltage Curves (RMH54-415B1)

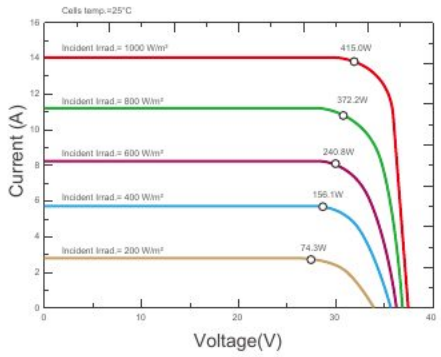

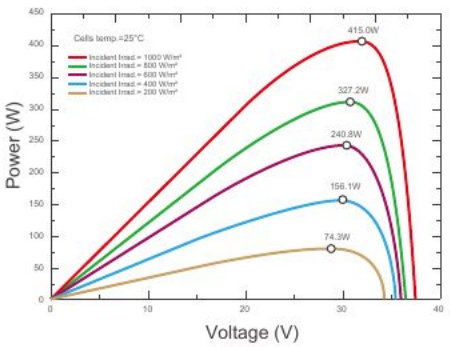

Electrical Characteristics (STC/NOCT)

Module Type	RMH54-390B1		RMH54-395B1		RMH54-400B1		RMH54-405B1		RMH54-410B1		RMH54-415B1	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power- Pmax(W)	390	294	395	298	400	302	405	306	410	310	415	314
Open Circuit Voltage - Voc(V)	36.85	34.62	36.98	34.75	37.07	34.88	37.23	35.12	37.32	35.23	37.45	35.37
Short- Circuit Current - Isc(A)	13.61	10.89	13.70	10.96	13.79	11.03	13.87	11.10	13.95	11.16	14.02	11.22
Voltage at Pmax -Vmp(V)	30.64	28.87	30.84	29.08	31.01	29.26	31.21	29.47	31.45	29.72	31.61	29.89
Current at Pmax - Imp(A)	12.73	10.18	12.81	10.25	12.90	10.32	12.98	10.38	13.04	10.43	13.13	10.50
Module Efficiency -ηm(%)	20.0	/	20.2	/	20.5	/	20.8	/	21.0	/	21.3	/
Power Tolerance(W)	（0，+4.99W）											
Maximum System Voltage(V)	1500Vdc (IEC / UL)											
Maximum Series Fuse Rating (A)	25A											

STC ： Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5　　NOCT： Irradiance 800W/m², Ambient Temperature 20°, Air Mass 1.5, Wind Speed 1m/s

Mechanical Specifications

External Dimensions	1722x1134x30mm
Weight	21.5kg
Solar Cells	Mono crystalline 182mm (2x54pcs)
Front Glass	AR Coated 3.2 mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm², 1200mm (+) ,1200mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Packing Configuration

	1722x1134x30mm	
Container	20'GP	40'HQ
Pieces per Pallet	36	36
Pallets per Container	6	26
Pieces per Container	216	936

Temperature Characteristics

Pmax Temperature Coefficient	-0.350%/°C
Voc Temperature Coefficient	-0.275%/°C
Isc Temperature Coefficient	+0.045%/°C
Operating Temperature	-40~+85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C